
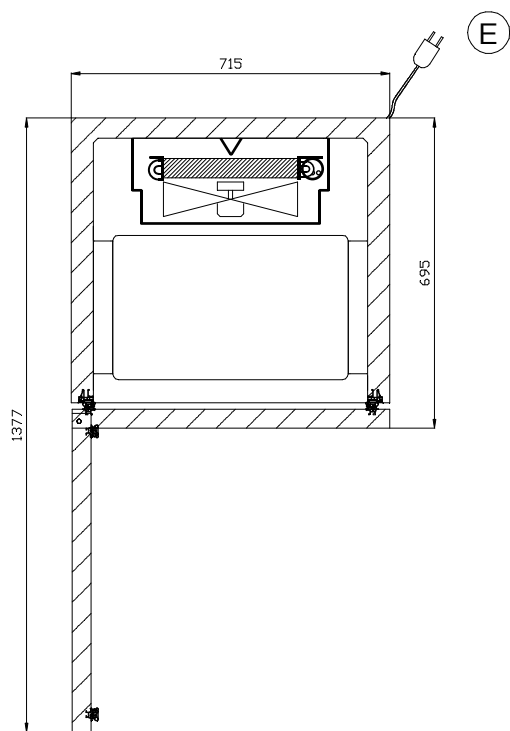
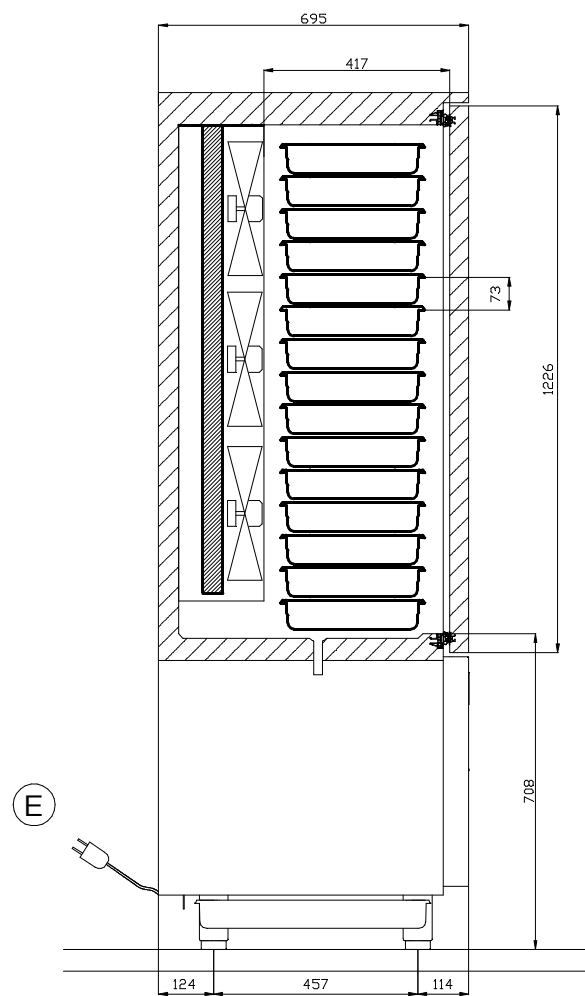



Technical data	S
Cooling capacity (Evap. -10°C / Cond. 45°C)	1622 W
Condensation	self-contained air
Refrigerant gas	R290
GWP	3
Climate class	4
Power supply (Ph / Volts / Hz)	220-240/1N/50
Max. power consumption cold cycles	1962 W - 9,6 A
Blast chilling (+90 °C, +3 °C)	40 kg
Shock freezing (+90°C, -18°C)	28 kg
Internal dimensions (wxpxh)	615 x 417 x 1140 mm
External dimensions (wxpxh)	715 x 695 x 1921 mm
Capacity (liter)	292 L
Packaging dimensions	730 x 755 x 1935 mm
Packing volume	1.1 m ³
Gross weight	172 kg

EN22042			
+65°C +10°C	kWh/Kg	0,102	+65°C -18°C
	Min.	105	
	Kg	35	
	kWh/Kg	0,256	
	Min.	267	
	Kg	23	




GASTRONOMIA / GASTRONOMY

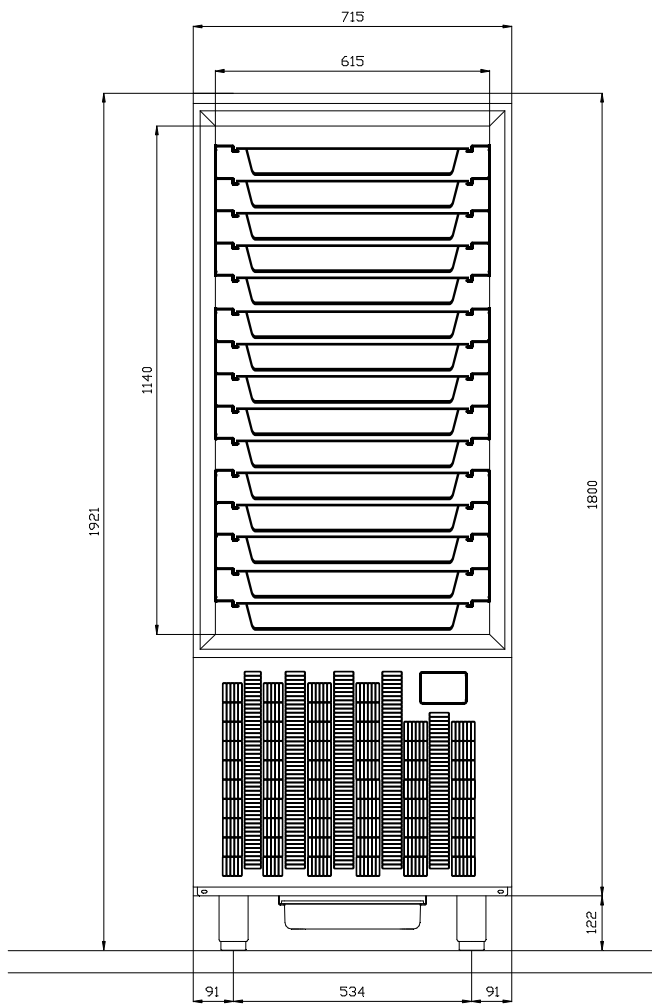


 H MIN 120 mm
H MAX 165 mm

 CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION





PASTICCERIA / PASTRY

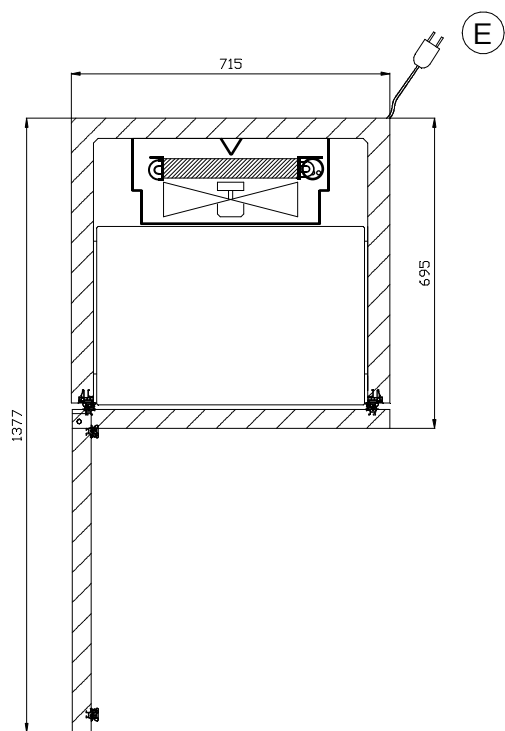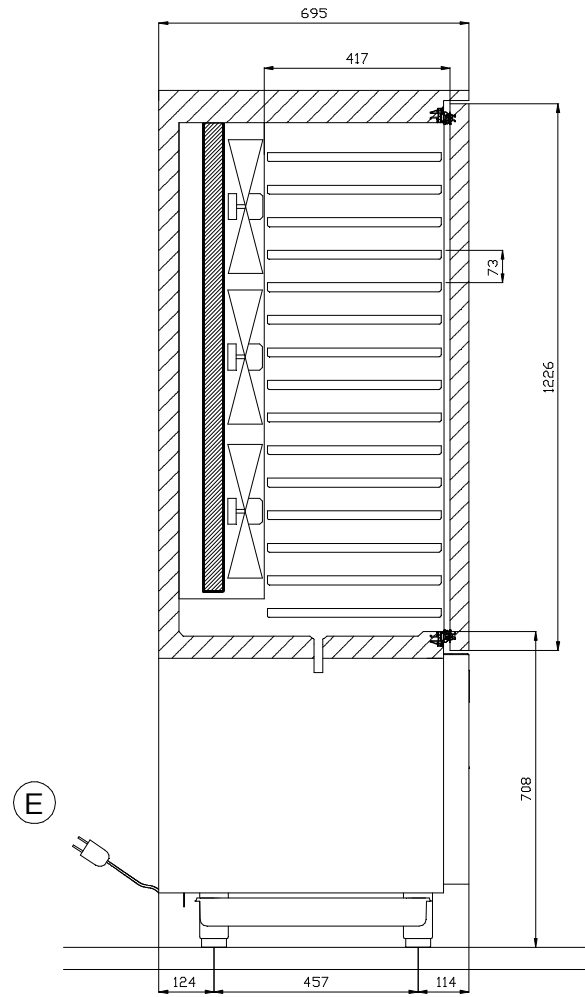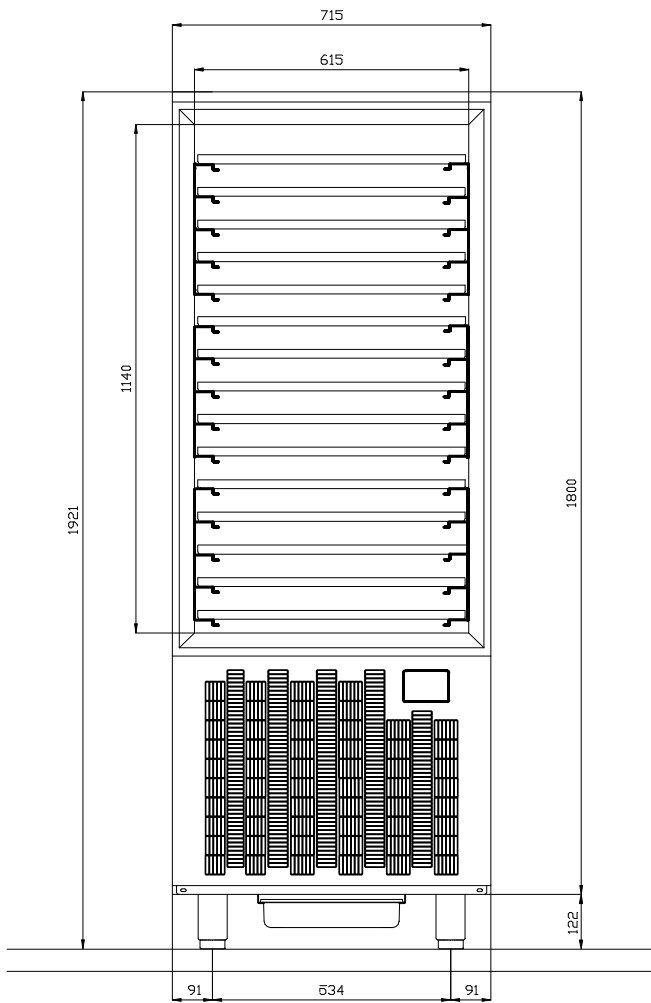

 H MIN 120 mm
H MAX 165 mm

 CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION

GELATO / ICE CREAM

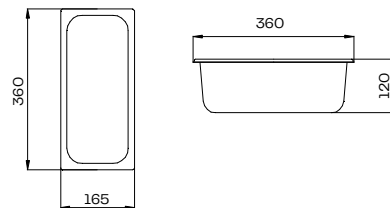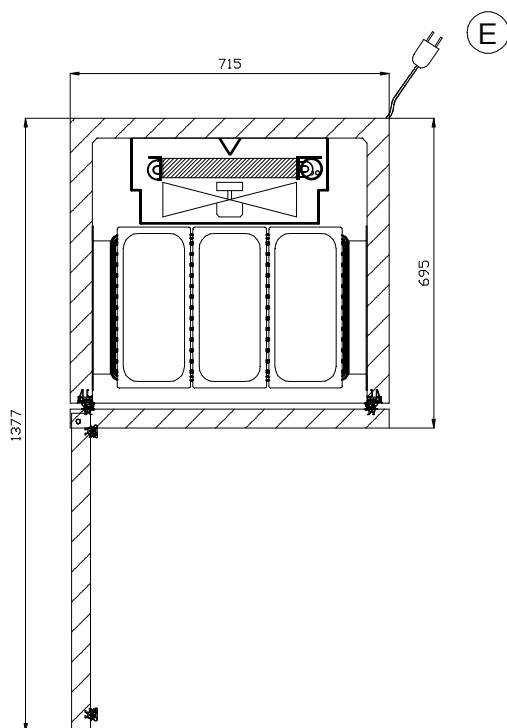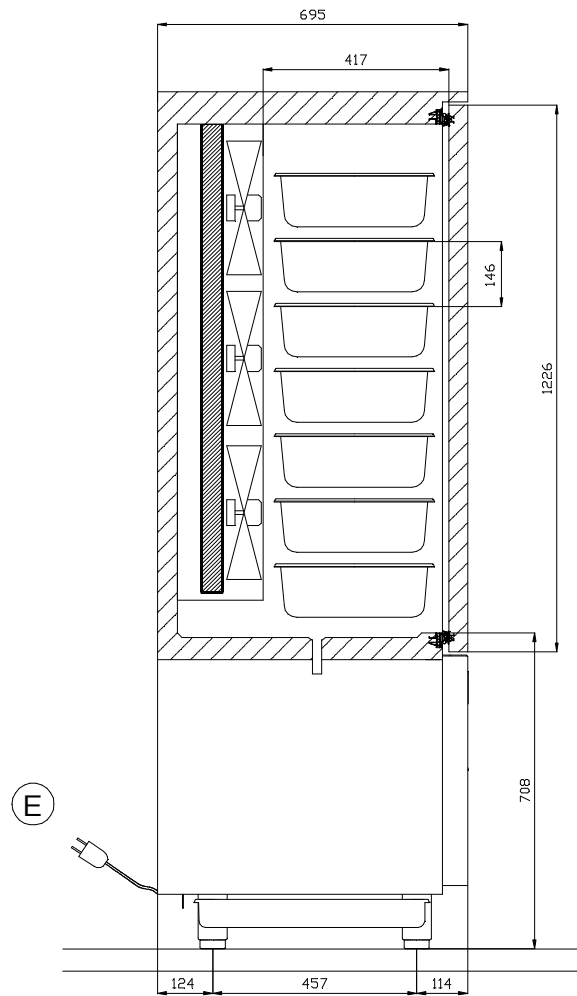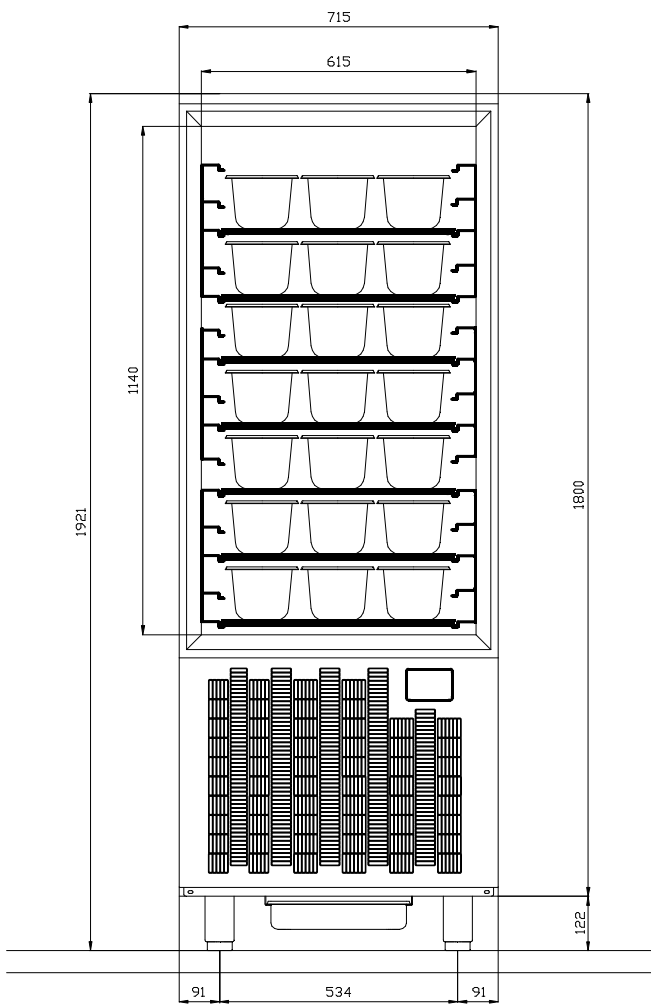

H MIN 120 mm
H MAX 165 mm

(E) CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION